Installation Guide

NXD-435 4.3" Modero® Wall/Flush Mount Touch Panel

For more detailed installation, configuration, programming, file transfer, and operating instructions, refer to the *NXD-430/435 Operation/Reference Guide*, available online at **www.amx.com**.

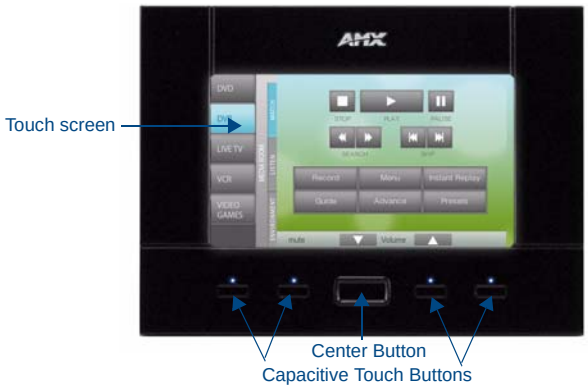

FIG. 1 NXD-435 4.3" Modero Wall/Flush Mount Touch Panel - Black

Overview

The NXD-435 Modero® Wall/Flush Mount Touch Panel includes a mini-USB port for programming, and five NetLinx-programmable buttons. All power is supplied via Power Over Ethernet (PoE), utilizing a PS-POE-AF PoE Injector (**FG423-80**) or equivalent PoE device.The NXD-435 comes in black (**FG2262-03**) and white (**FG2262-04**).

Specifications

NXD-435 (FG2262-03/04) Specifications	
Dimensions (HWD):	• NXD-435: 4.13" x 5.5" x 2.13" (10.48 cm x 13.97 cm x 5.40 cm) • CB-TP5 Rough-In/Wallbox (optional): 4.27" x 5.14" x 3.40" (10.86 cm x 13.06 cm x 8.64 cm)
Weight:	• 0.65 lbs (0.29 kg)
Power Requirements:	• PoE Powered - No local Power Supply needed • Max power draw: 5.5W.
Memory (Factory default):	• 128 MB SDRAM • 256 MB integrated Flash Memory (not upgradeable - factory programmed)
Certifications:	• FCC Part 15 Class B • CE • IEC 60950 • RoHS
Panel LCD Parameters:	• Aspect ratio: 16 x 9 • Minimum brightness (luminance): 280 cd/m2 • Channel transparency: 8-bit Alpha blending • Contrast ratio: 250:1 • Display colors: 256 thousand colors (18-bit color depth) • Dot/pixel pitch: 0.14 mm • Panel type: WQVGA • Screen resolution: 480 x 272 pixels (HV) @ 60 Hz frame frequency • Viewing dimensions: 2 3/16" x 3 13/16" (5.56 cm x 9.68 cm)
Active Screen Area:	• 2 1/8" x 3 3/4" (5.40 cm x 9.53 cm)
Viewing Angles:	• Left/Right/Up/Down: 80/80/60/80
Front Panel Components:	• *Center Button:* Capacitive touch button provides both access to the *Setup* and *Calibration* pages and toggles the panel between a "sleep" or "wake" state. This button is also user-programmable. • *Capacitive Touch Buttons:* four user-programmable buttons, two on either side of the Center Button.

NXD-435 Specifications (Cont.)	
Side Panel Connectors:	• Ethernet 10/100 Port: RJ-45 port for 10/100 Mbps communication. The Ethernet port automatically negotiates the connection speed (10 Mbps or 100 Mbps), and whether to use half duplex or full duplex mode. Power is supplied through Power Over Internet (PoE). NXD-435 panels communicate with the NetLinx Master using the ICSP protocol over Ethernet. LEDs show communication activity, connections, speeds, and mode information: *L/A-link/activity* - Yellow LED lights On when the Ethernet cables are connected and terminated correctly and then blinks when receiving Ethernet data packets. *SPD-speed* - Green LED lights On when the connection speed is 100 Mbps and turns Off when the speed is 10 Mbps. • Mini-USB Connector: 5-pin Mini-USB connector used for programming, firmware update, and touch panel file transfer between the PC and the target panel.
Operating /Storage Environments:	• Operating Temperature: 0° C (32° F) to 40° C (104° F) • Operating Humidity: 5% - 85% relative humidity (non-condensing) • Storage Temperature: -20° C (-4° F) to 60° C (140° F) • Storage Humidity: 5% - 85% RH
Included Accessories:	• NXD-435 Installation Guide (**93-2262-03**)
Other AMX Equipment:	• CB-TP5i Rough-In/Wallbox (**FG038-11**) • Back Cover for the CB-TP5i Rough-In/Wallbox (**FG038-12**) • PS-POE-AF PoE Injector (**FG423-80**) • NXA-BEZP-435-BL Black Portrait Bezel Kit for the NXD-435 (**FG2262-12**) • NXA-BEZP-435-WH White Portrait Bezel Kit for the NXD-435 (**FG2262-13**) • CC-USB Type-A to Mini-B 5-wire programming cable (**FG10-5965**) • NXA-RK5 Rack Mount Kit for 5" Wall Mount panels (**FG2904-55**): - 5" Rackmount - Four Screws, #10-32 x.625, PH Truss, BLK - Four Washers, #10, Black Nylon - Three Screws, #4-40 x.250, PPH, BLK

Panel Connectors and Wiring

FIG. 2 shows the connectors located on the NXD-435 Modero panel. The mini-USB port is used for programming the touch panel.

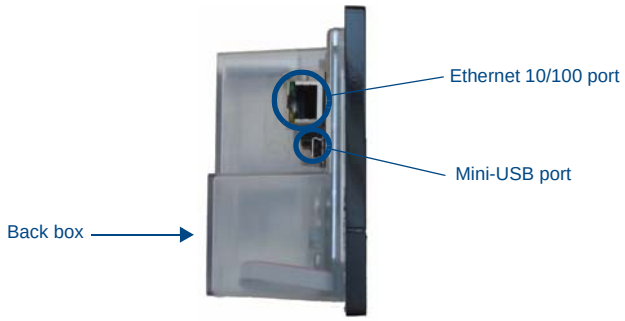

FIG. 2 Connector layout on the NXD-435 Modero Wall/Flush Touch Panel

For more information on connection and use of the Panel Connectors, as well as information on programming, please refer to the *NXD-430/435 Operation/Reference Guide*, available at **www.amx.com**.

Capacitive Touch Buttons

The NXD-435 has one main button on the front of the device, in the center of the bezel, and two smaller buttons on each side. This button has several uses:

- Press the button once to start a previously programmed function, or to turn off the display if not previously programmed.
- Press and hold the button for 6 seconds to put the device into *Setup Mode*.
- Press and hold the button for 9 seconds to enter *Calibration Mode*.
- Press and hold the button for 20 seconds to reboot the panel.

The NXD-435 also has four smaller buttons, two on either side of the front button, that may be programmed for individual functions.

All five buttons on the NXD-435 utilize capacitive touch, which detects the electrical conductivity of human skin and reacts directly to touch. This allows the button to resist wear and dirt, as the button does not have any actual physical button to depress.

NXD-435 Setup and System Connection

1. Carefully remove the panel from the shipping box, peel the protective plastic cover from the LCD, and apply power to the panel via the PoE Injector.
2. From below the LCD, press the front button for 9 seconds (passing over the *Setup* page) to access the *Calibration* setup page and follow the on-screen instructions to return to the main *Setup* page.
3. Press the on-screen **Protected Setup** button on the *Setup* page.
4. Enter the panel password into the on-screen keypad (default is ***1988)***.
5. Press the *Device Number* field to open the on-screen Device Number keypad and enter a value for the panel (*default is 32001*).
6. Press the **System Settings** button to open the *System Settings* page.
7. On the **IP** tab, toggle the *DHCP Static* field to **DHCP** if it is not already set to DHCP.
8. On the **Master** tab, toggle the *Type* field to **Ethernet**.
   - Toggle the *Mode* field to **URL**.
   - Enter both the System Number and Master IP Address.
9. Enter a valid Username and Password if the target Master is secured.
10. Press the **Back** button and then press the on-screen **Reboot** button to save any changes and cycle power to the panel.

Installation of the NXD-435

While the NXD-435 is designed to fit into pre-existing NXD-CV5 touch panel sites, the actual installation differs from that of the NXD-CV5 in several significant ways. The NXD-435 can be installed either directly into the (optional) CB-TP5I Rough-In Box or another solid surface environment, using either solid surface screws or the included locking tabs for different mounting options. For more information, please refer to the *NXD-430/435 Operation/Reference Guide*, available at **www.amx.com**.

The NXD-435 is contained within a clear outer housing known as the back box (FIG. 3). This back box is not removed when installing the device into a wall or into a Rough-In Box.

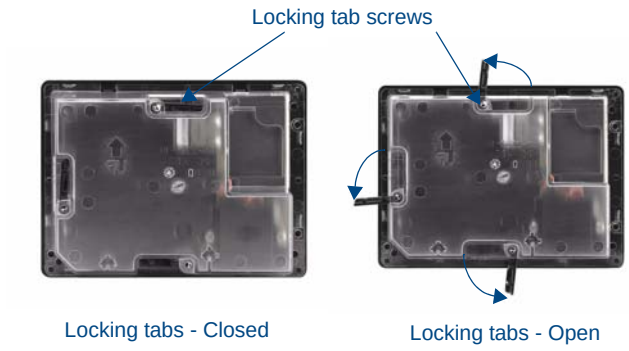

FIG. 3 NXD-435 backbox with closed and open locking tabs

Installing the NXD-435 into a wall

The NXD-435 comes with a clear plastic backbox (FIG. 7) designed to attach the panel to most standard wall materials. This backbox has a locking tab on three of the four faces (missing only on the face containing the space for the connections) to help lock the backbox to the wall. These locking tabs are only extended AFTER the backbox is inserted into the wall.

WARNING: *When installing the backbox, make sure that the assembly is in the correct position and in the correct place. Once the locking tabs are extended and locked into place, removing the backbox may be difficult without having access to the back of the wall or causing damage to the wall.*

Note: *In order to guarantee a stable installation of the NXD-435, the thickness of the wall material must be a minimum of .50 inches (1.27cm) and a maximum of .875 inches (2.22cm).*

WARNING: *The maximum recommended torque to screw in the locking tabs on the plastic back box is 5 IN-LB [56 N-CM]. Applying excessive torque while tightening the tab screws, such as with powered screwdrivers, can strip out the locking tabs or damage the plastic back box.*

1. Prepare the area by removing any screws or nails from the drywall before beginning the cutout process.
2. Cut out the surface for the back box. Refer to the dimensions in the *NXD-430/435 Operation/Reference Guide*, available from **www.amx.com**, for more information.

CAUTION: *Making sure that the actual cutout opening be slightly smaller than the provided dimensions is highly recommended. This action provides the installer with a margin for error if the opening needs to be expanded. Too little wall material removed is always better than too much.*

3. Remove the faceplate from the NXD-435.
4. Disconnect the capacitive touch connector from the 10-pin plug on the faceplate.
5. Insert both connectors into their corresponding locations along the left side of the NXD-435 touch panel.
6. Test the incoming wiring by attaching the panel connections to their terminal locations and applying power via the PoE Injector. Verify that the panel is receiving power and functioning properly to prevent repetition of the installation.
7. Thread the incoming Ethernet and mini-USB wiring (if mini-USB access is desired) from their terminal locations through the surface opening. *Leave enough slack in the wiring to accommodate any re-positioning of the panel.*
8. Push the back box into the wall opening. Insure that the locking tabs lie flush against the back box.
9. Extend the locking tabs on the sides of the back box by tightening the screws inside the box until snug. Not all of the tabs must be extended to lock the back box in place, but extending a minimum of the top and bottom tabs is highly recommended. Apply enough pressure to the screw head to keep the box flush with the wall: this ensures that the locking tabs will tighten up against the inside of the wall.
   The back box is clear to allow visual confirmation that the tabs have been extended and are gripping the wall, as well as in assisting with removal if necessary.

NOTE: *Do not disconnect the connectors from the touch panel. The unit must be installed with the attached connectors before being inserted into the drywall.*

10. Reconnect the capacitive touch connector to the 10-pin plug on the faceplate.
11. Place the faceplate back onto the device.
12. Reconnect the terminal Ethernet and USB to their respective locations on either the Ethernet port or NetLinx Master.

Installing the NXD-435 into a Flat Surface using #4 screws

Three #4 mounting screws (not included) are secured through circular holes located at the left and right sides of the NXD-435. The most important thing to remember when mounting the NXD-435 is that the outer frame (Mounting Tabs) must be installed flush against the mounting surface.

- Refer to SP-2261-02 for detailed installation dimensions.
- Cutting out the surface slightly smaller than what is outlined in the installation drawings in order to make any necessary cutout adjustments, is highly recommended.

1. Prepare the area by removing any screws or nails from the surface before beginning the cutout process.
2. Cut out the surface for the NXD-435.
3. Remove the faceplate from the NXD-435.
4. Disconnect the capacitive touch connector from the 10-pin plug on the faceplate.
5. Thread the incoming Ethernet and USB wiring from their terminal sources through the surface opening. Leave enough slack in the wiring to accommodate any re-positioning of the panel.
6. Connect the Ethernet and USB connectors to their corresponding locations along the left side of the un-powered NXD-435 touch panel. The USB connectors can be from either a USB extension cable or a wireless USB RF transmitter.

NOTE: *Do not disconnect the connectors from the touch panel. The unit must be installed with the necessary connectors before being inserted into the solid surface.*

7. Carefully slide the main unit into the cutout until the Mounting Tabs of the NXD-435 lie flush against the wall.
8. Insert and secure three #4 Mounting Screws (not included) into the corresponding holes located along the sides of the NXD-435, using a grounded Phillips-head screwdriver, until the unit is secure and flush against the wall.
9. Reconnect the capacitive touch connector to the 10-pin plug on the faceplate.
10. Place the faceplate back onto the device.
11. Reconnect the terminal Ethernet and USB to their respective locations on either the Ethernet port or NetLinx Master.

©2011 AMX. All rights reserved. AMX and the AMX logo are registered trademarks of AMX.
AMX reserves the right to alter specifications without notice at any time.
3000 RESEARCH DRIVE, RICHARDSON, TX 75082 • 800.222.0193 • fax 469.624.7153 • technical support 800.932.6993 • www.amx.com